


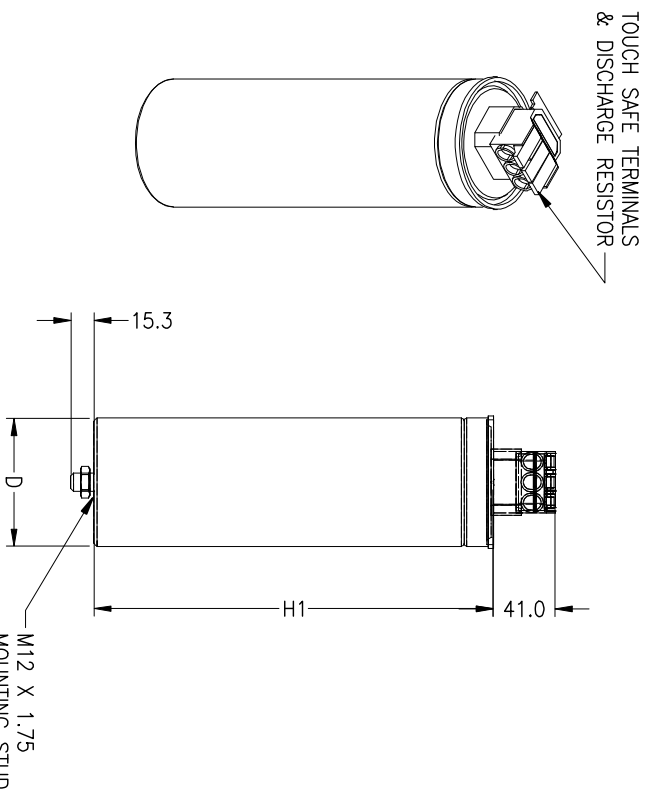




Volts	kVar	Amps	NAME	NAME	WEIGHT kg	DESIGN 1		DESIGN 2	
			PLATE	PLATE		H1	D	H1	D
208	4.9	13.6	6.5	300	1.0			265	65
	9.8	27.2	13.6	300	1.7			265	85
240	6.5	15.6	6.5	300	1.0			265	65
	13.0	31.3	13.0	300	1.7			265	85
	5.0	6.0	6.0	525	0.8			190	65
	6.7	8.0	8.0	525	0.8			190	65
	8.3	10.0	10.0	525	0.8			190	65
480	10.0	12.0	12.0	525	1.0			265	65
	12.5	15.0	15.0	525	1.3				
	15.0	18.0	18.0	525	1.3	190	85		
	20.0	24.0	24.0	525	1.7	265	85		
	25.0	30.0	30.0	525	1.7	265	85		
	25.0	30.0	33.0	550	2.1	340	85		
	5.0	4.8	7.0	690	0.8			190	65
	6.3	6.1	9.0	690	1.0			265	65
	8.3	8.0	8.0	690	1.0			265	65
600	10.0	9.6	13.0	690	1.3	190	85		
	12.5	12.0	17.0	690	1.7	265	85		
	15.0	14.4	20.0	690	1.7	265	85		
	20.0	19.0	26.0	690	2.1	340	85		
	25.0	24.1	33.0	690	2.1	340	85		
	28.0	21.0	28.0	999	2.1	340	85		
999	45.94	34.5	45.94	999	3.5	340	116		

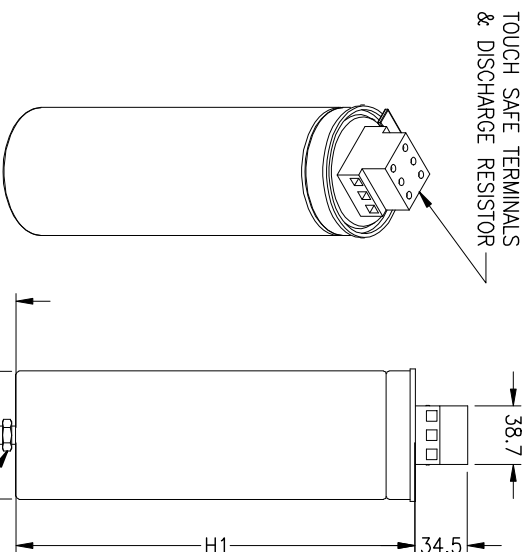

5 MINUTE WARNING LABEL,
SUPPLIED LOOSE, TO BE
PLACE ON CAPACITOR
DISCONNECT ENCLOSURE



Notes:
1. Discharge resistors provided.
2. All dimensions in mm unless noted
otherwise.

Title:
TYPICAL LOOSE CAPACITOR

Model: R300



This drawing is the property of Electrotek Ltd.
The information and technology herein may not
be used nor reproduced without the written
permission of Electrotek Ltd.
All reproductions, in whole or in part, including
shop drawings, shall refer to this drawing.

1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 287 2200 Fax: 403 287 3808
contact@electrotekltd.com
www.electrotekltd.com

Revised: 24/09/22 Drawn by: RT

Page: 1 of 1