



TOUCH SAFE TERMINALS
& DISCHARGE RESISTOR

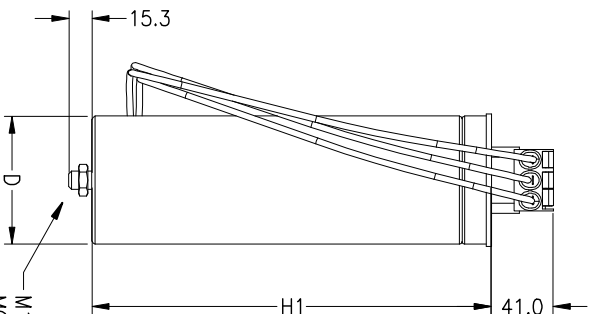


M12 X 1.75
MOUNTING STUD

DESIGN 1

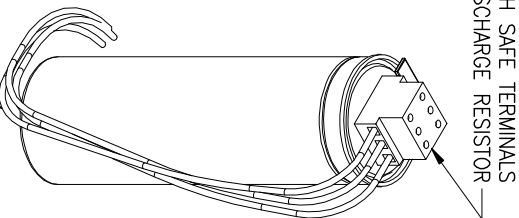

TOUCH SAFE TERMINALS
& DISCHARGE RESISTOR

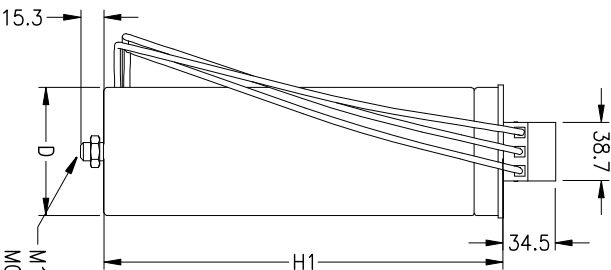


M12 X 1.75
MOUNTING STUD


DESIGN 2

36" TEW
TIN PLATED
COPPER WIRE

		NAME		WEIGHT	DESIGN 1		DESIGN 2	
		PLATE	PLATE		H1	D	H1	D
Volts	kVar	Amps	kVar	VOLTS	kg			
208	4.9	13.6	6.5	300	1.0		265	65
	9.8	27.2	13.6	300	1.7		265	85
	6.5	15.6	6.5	300	1.0		265	65
240	13.0	31.3	13.0	300	1.7		265	85
	5.0	6.0	6.0	525	0.8		190	65
	6.7	8.0	8.0	525	0.8		190	65
	8.3	10.0	10.0	525	0.8		190	65
480	10.0	12.0	12.0	525	1.0		265	65
	12.5	15.0	15.0	525	1.3		190	85
	15.0	18.0	18.0	525	1.3		190	85
	20.0	24.0	24.0	525	1.7		265	85
	25.0	30.0	30.0	525	1.7		265	85
	25.0	30.0	33.0	550	2.1		340	85
	5.0	4.8	7.0	690	0.8		190	65
	6.3	6.1	9.0	690	1.0		265	65
	8.3	8.0	8.0	690	1.0		265	65
600	10.0	9.6	13.0	690	1.3		190	85
	12.5	12.0	17.0	690	1.7		265	85
	15.0	14.4	20.0	690	1.7		265	85
	20.0	19.0	26.0	690	2.1		340	85
	25.0	24.1	33.0	690	2.1		340	85
	28.0	21.0	28.0	999	2.1		340	85
999	45.94	34.5	45.94	999	3.5		340	116



5 MINUTE WARNING LABEL,
SUPPLIED LOOSE, TO BE
PLACE ON CAPACITOR
DISCONNECT ENCLOSURE



Notes:
1. Discharge resistors provided.
2. All dimensions in mm unless noted
otherwise.

Title:
TYPICAL LOOSE CAPACITOR

Model: R383



This drawing is the property of Electrotek Ltd.
The information and technology herein may not
be used nor reproduced without the written
permission of Electrotek Ltd.
All reproductions, in whole or in part, including
shop drawings, shall refer to this drawing.

1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 287 2200 Fax: 403 287 3808
contact@electrotekltd.com
www.electrotekltd.com

Revised: 28/04/22 Drawn by: RT

Page: 1 of 1