


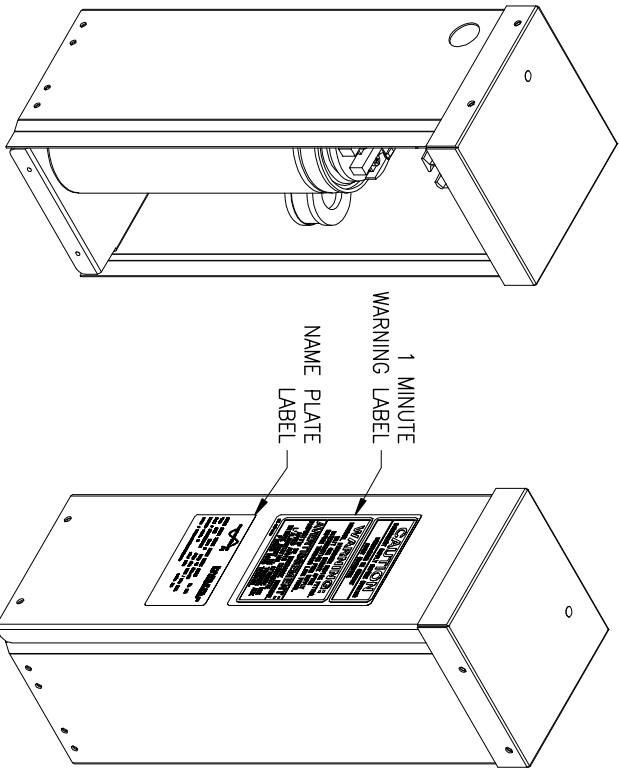


Volts	kVA _r	Amps	Fuse	Wire
208	4.9	13.6	30A	#10 TEW
	9.8	27.2	60A	#8 TEW
	3.2	3.6	10A	#14 TEW
	4.0	4.8	10A	#14 TEW
	5.0	6.0	20A	#14 TEW
480	6.7	8.0	20A	#14 TEW
	8.3	10.0	20A	#14 TEW
	10.0	12.0	30A	#10 TEW
	12.5	15.0	30A	#10 TEW
	15.0	18.0	40A	#10 TEW
600	20.0	24.0	50A	#10 TEW
	25.0	30.0	60A	#8 TEW
	5.0	4.8	10A	#14 TEW
	6.3	6.1	20A	#14 TEW
	8.3	8.0	20A	#14 TEW
	10.0	9.6	20A	#14 TEW
	12.5	12.0	30A	#10 TEW
	15.0	14.5	30A	#10 TEW
	20.0	19.3	40A	#10 TEW
	25.0	24.1	50A	#10 TEW

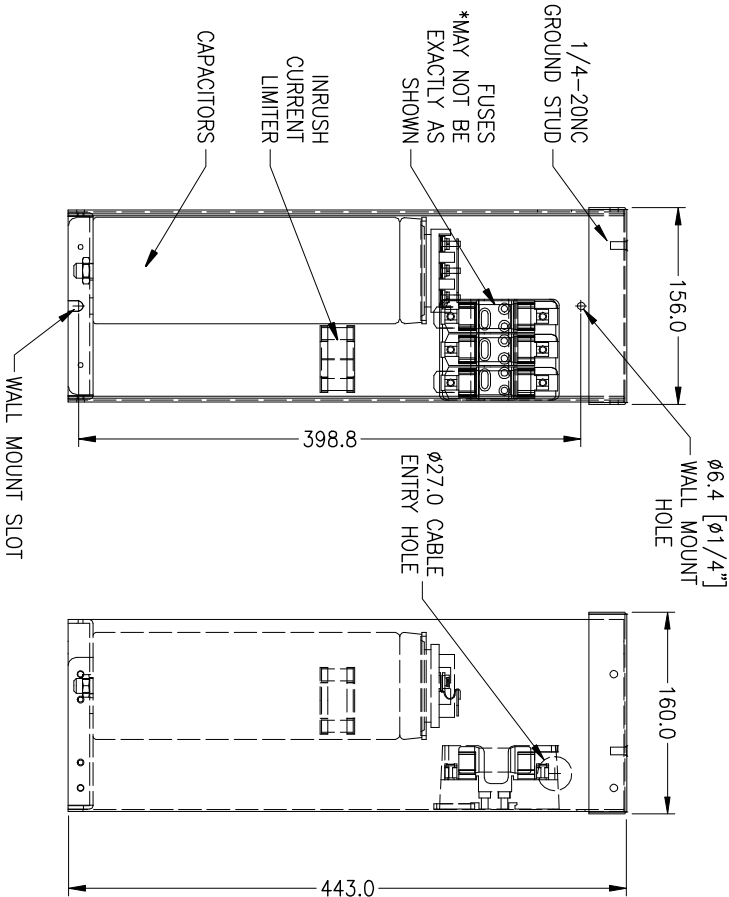

5 MINUTE WARNING LABEL,
SUPPLIED LOOSE, TO BE
PLACED ON CAPACITOR
DISCONNECT ENCLOSURE

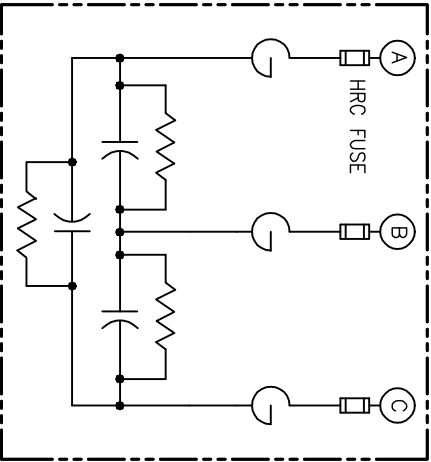

- Notes:**
1. Discharge reactors provided.
 2. NEMA 3R Galvanized enclosure.
 3. Floor mounting brackets provided on request.
 4. All dimensions in mm unless noted otherwise.

This drawing is the property of Electrotek Ltd. The information and technology herein may not be used nor reproduced without the written permission of Electrotek Ltd. All reproductions, in whole or in part, including shop drawings, shall refer to this drawing.

Revised: 08/05/24

Title: Typical Fuse Packaged Capacitor

Model: R500F



1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 287 2200 Fax: 403 287 3808
contact@electrotekltd.com
www.electrotekltd.com

Page: