



Volts	kVA _r	Amps	Fuses	Wire
208	14.7	40.8	80A	#8 TEW
	19.5	54.2	100A	#8 TEW
	24.4	67.7	125A	#8 TEW
	29.3	81.3	150A	#8 TEW
480	34.3	94.9	175A	#8 TEW
	30.0	36.0	60A	#10 TEW
	35.0	42.0	70A	#10 TEW
	40.0	48.0	80A	#10 TEW
600	45.0	54.0	90A	#8 TEW
	50.0	60.0	100A	#8 TEW
	30.0	28.9	60A	#10 TEW
	35.0	33.7	60A	#10 TEW
	40.0	38.5	70A	#10 TEW
	45.0	43.3	80A	#10 TEW
	50.0	48.1	80A	#10 TEW

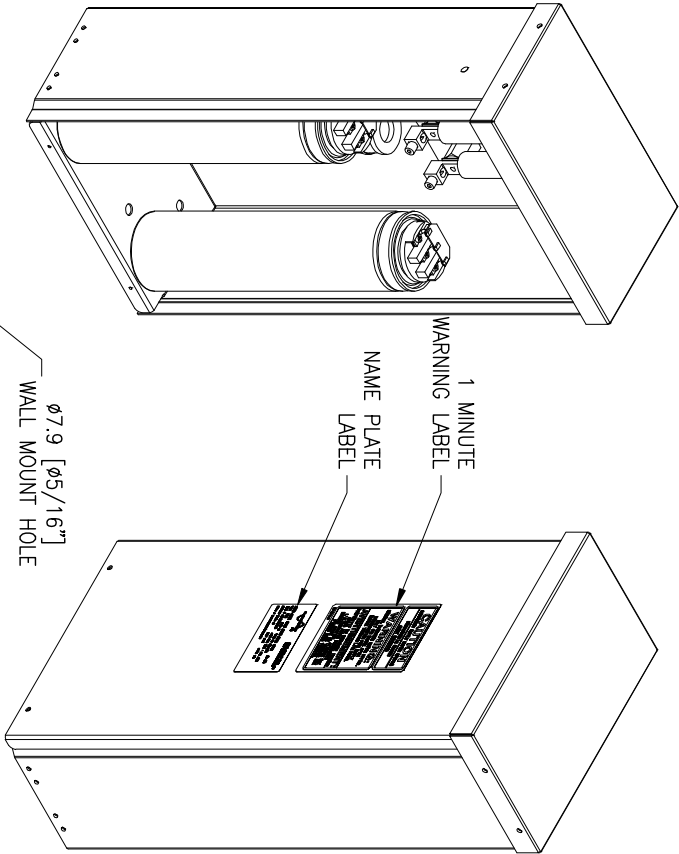

5 MINUTE WARNING LABEL,
SUPPLIED LOOSE, TO BE
PLACED ON CAPACITOR
DISCONNECT ENCLOSURE



- Notes:**
1. Discharge reactors provided.
 2. NEMA 3R Galvanized enclosure.
 3. Floor mounting brackets provided on request.
 4. All dimensions in mm unless noted otherwise.

This drawing is the property of Electrotek Ltd. The information and technology herein may not be used nor reproduced without the written permission of Electrotek Ltd. All reproductions, in whole or in part, including shop drawings, shall refer to this drawing.

Revised: 08/05/24


Title: Typical Fuse Packaged
Capacitor with ICL

Model: R500F



1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 287 2200 Fax: 403 287 3808
contact@electrotekltd.com
www.electrotekltd.com

Page:

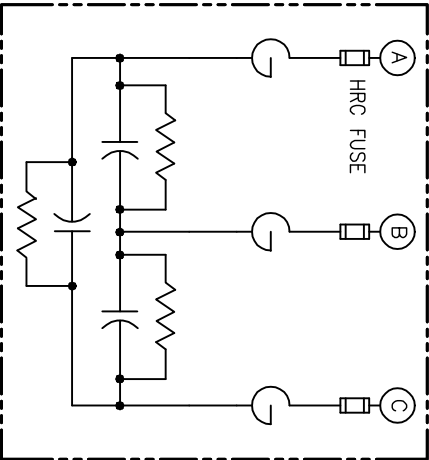

SCHEMATIC DIAGRAM

