

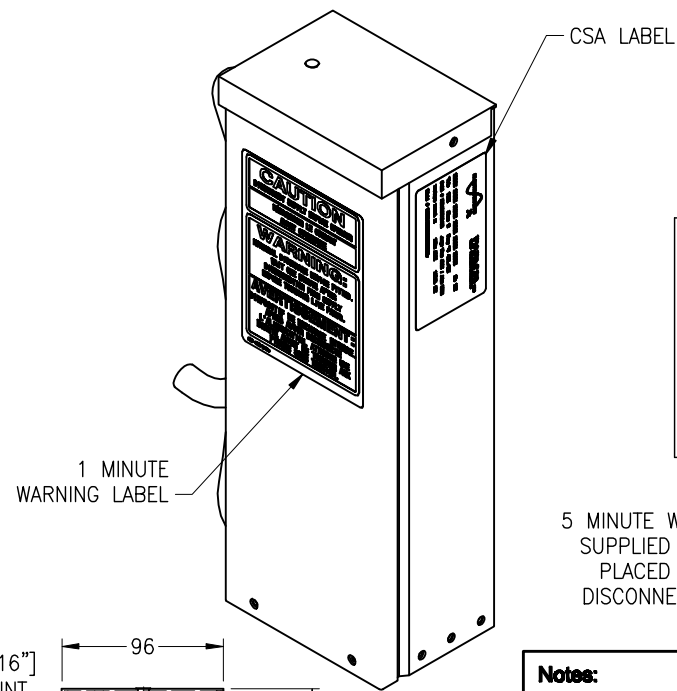
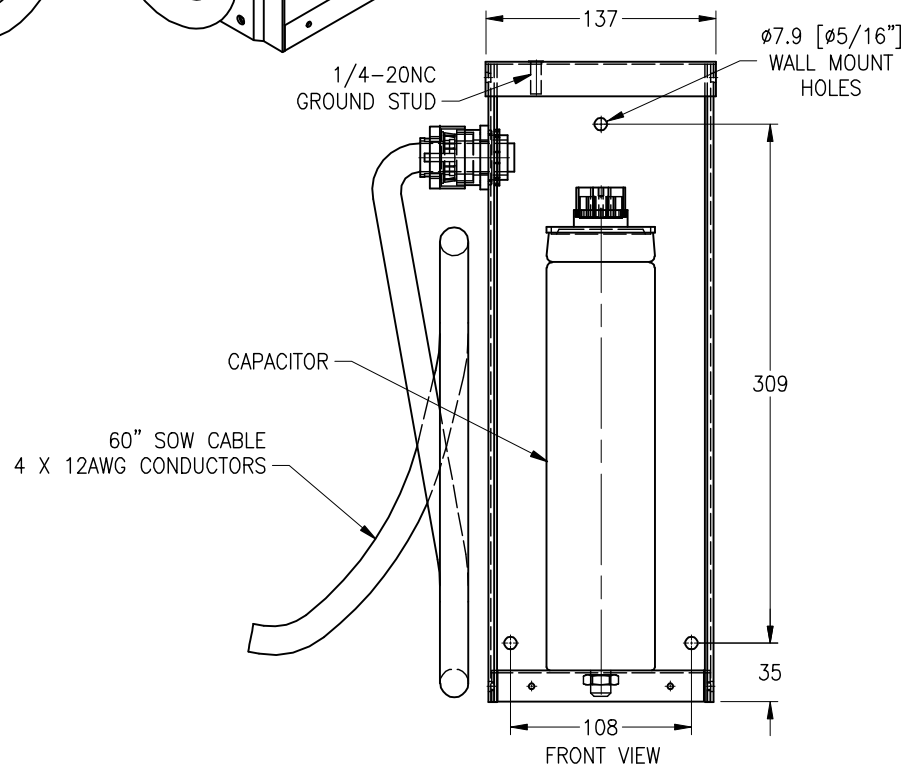


| kVAr | Amps |
|------|------|
| 3.0  | 3.6  |
| 4.0  | 4.8  |
| 5.0  | 6.0  |
| 6.7  | 8.0  |
| 8.3  | 10.0 |
| 10.0 | 12.0 |
| 12.5 | 15.0 |
| 15.0 | 18.0 |
| 20.0 | 24.0 |

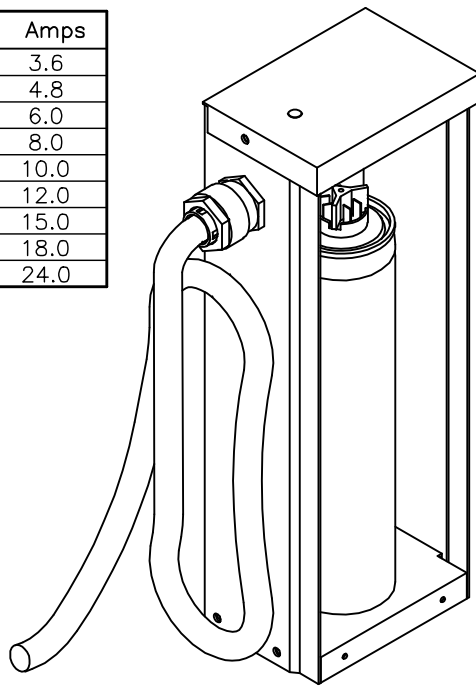

5 MINUTE WARNING LABEL,  
SUPPLIED LOOSE, TO BE  
PLACED ON CAPACITOR  
DISCONNECT ENCLOSURE

- Notes:**
1. Discharge resistors provided.
  2. NEMA 3R Galvanized enclosure.
  3. Floor mounting brackets provided on request.
  4. All dimensions in mm unless noted otherwise.

This drawing is the property of Electrotek Ltd. The information and technology herein may not be used nor reproduced without the written permission of Electrotek Ltd. All reproductions, in whole or in part, including shop drawings, shall refer to this clause.

Revised: 05/12/08

Title: Typical 480 Volt  
Pumpjack Capacitor

Model: R400



1016 34 AV SE Calgary, AB  
T2G 1V4 Canada  
Tel: 403 287 2200 Fax: 403 287 3808  
contact@electrotekltd.com  
www.electrotekltd.com

Page: 4