



Volts	kVar	Amps	W	L	H
208	4.9	13.6	140	108	381
	9.8	27.2	140	108	381
	3.0	3.6	140	108	381
	4.0	4.8	140	108	381
	5.0	6.0	140	108	381
480	6.7	8.0	140	108	381
	8.3	10.0	140	108	381
	10.0	12.0	140	108	381
	12.5	15.0	140	108	381
	15.0	18.0	140	108	381
600	20.0	24.0	140	108	381
	25.0	30.0	140	108	381
	5.0	4.8	140	108	381
	6.3	6.1	140	108	381
	8.3	8.0	140	108	381
	10.0	9.6	140	108	381
	12.5	12.0	140	108	381
	15.0	14.5	140	108	381
	20.0	19.3	160	156	445
	25.0	24.1	160	156	445

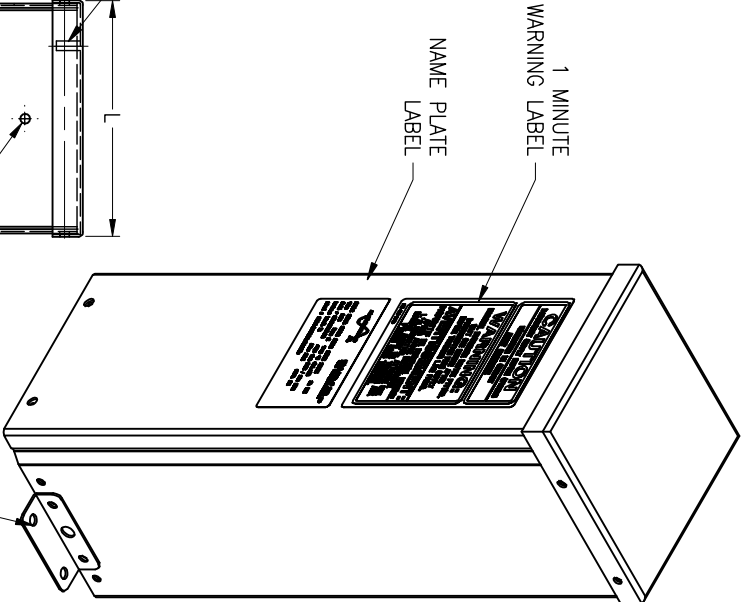

5 MINUTE WARNING LABEL, SUPPLIED LOOSE, TO BE PLACED ON CAPACITOR DISCONNECT ENCLOSURE

- Notes:**
1. Discharge reactors provided.
 2. NEMA 3R Galvanized enclosure.
 3. Floor mounting brackets provided on request.
 4. All dimensions in mm unless noted otherwise.

This drawing is the property of Electrotek Ltd. The information and technology herein may not be used nor reproduced without the written permission of Electrotek Ltd. All reproductions, in whole or in part, including shop drawings, shall refer to this drawing.

Revised: 11/05/22




Title: Typical Packaged Capacitor

Model: R500



1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 287 2200 Fax: 403 287 3808
contact@electrotekltd.com
www.electrotekltd.com

Page:

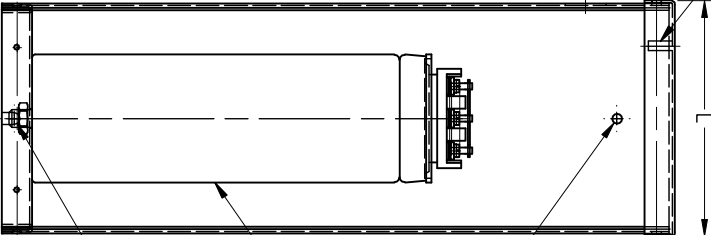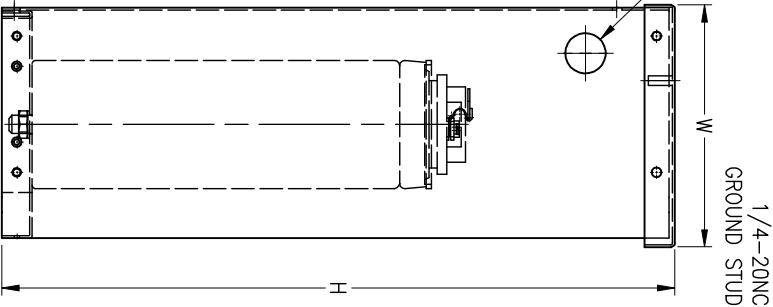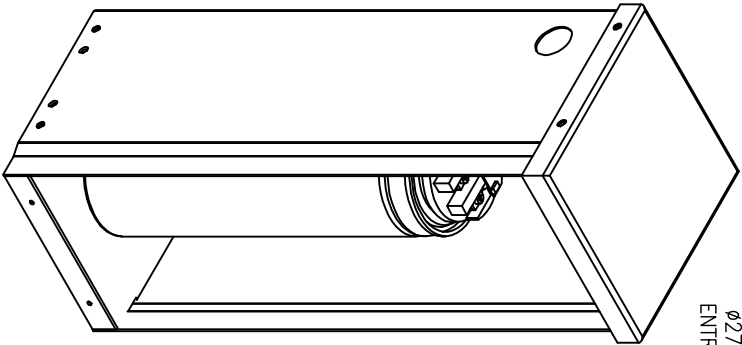

LEFT SIDE VIEW

FRONT VIEW

WALL MOUNT HOLE
ø6.4 [ø1/4"]
OPTIONAL FLOOR MOUNT BRACKET

CAPACITOR

WALL MOUNT SLOT