

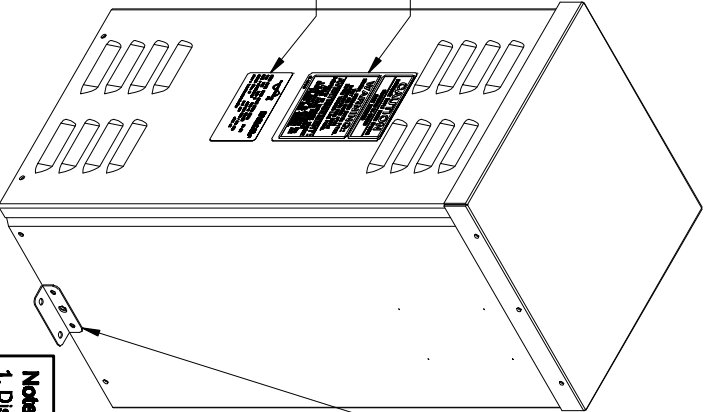
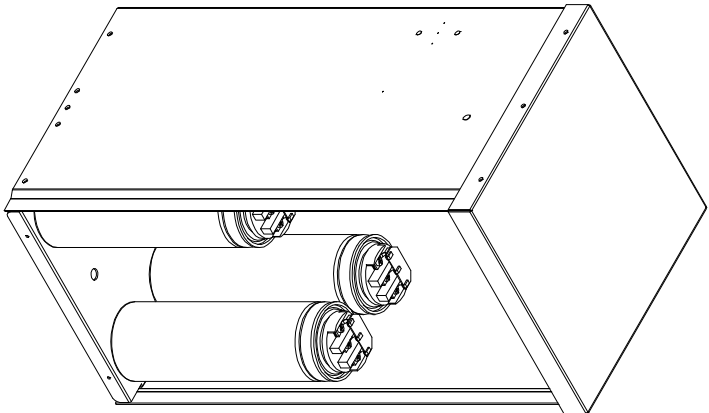


Volts	kVar	Amps	Fuse	Wire
208	39.2	108.2	200A	#8 TEW
	44.1	122.4	200A	#8 TEW
	55.0	66.0	125A	#8 TEW
	60.0	72.0	125A	#10 EPDM
	65.0	78.0	125A	#10 EPDM
480	70.0	84.0	150A	#10 EPDM
	75.0	90.0	150A	#10 EPDM
	80.0	96.0	175A	#10 EPDM
	85.0	102.0	175A	#8 TEW
	90.0	108.0	175A	#8 TEW
600	95.0	114.0	200A	#8 TEW
	100.0	120.0	200A	#8 TEW
	55.0	53.0	90A	#10 TEW
	60.0	57.8	100A	#10 TEW
	65.0	62.5	100A	#10 TEW
	70.0	67.4	125A	#10 EPDM
	75.0	72.2	125A	#10 EPDM
	80.0	77.1	125A	#10 EPDM
	85.0	81.9	150A	#10 EPDM
	90.0	86.7	150A	#10 EPDM
	95.0	91.5	150A	#10 EPDM
	100.0	96.2	175A	#10 EPDM

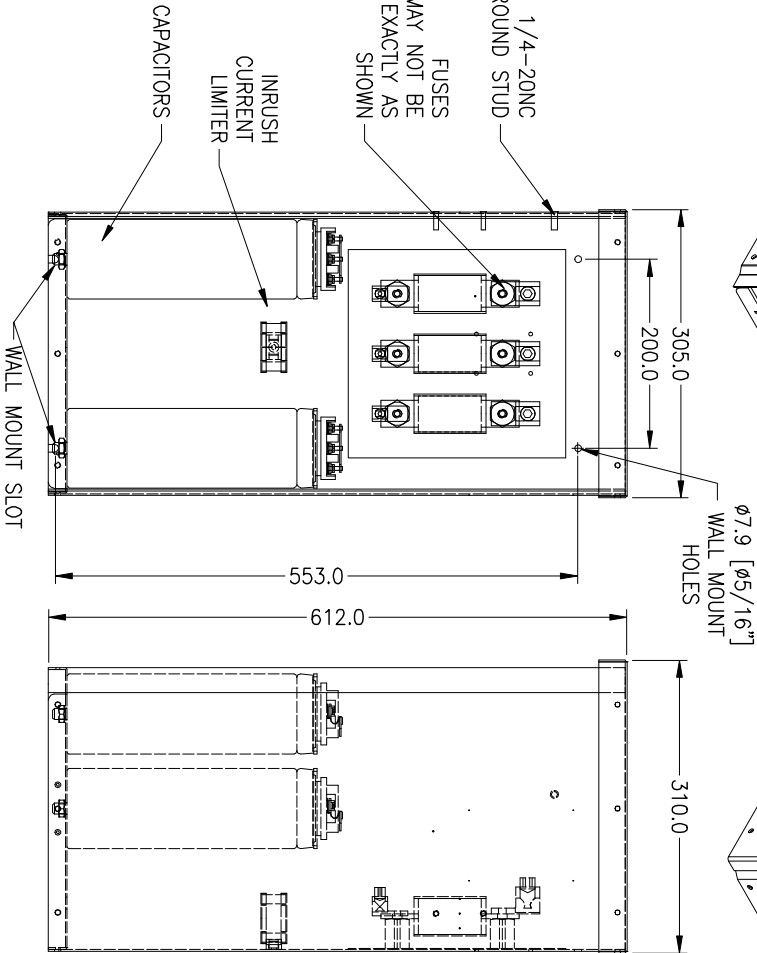

5 MINUTE WARNING LABEL,
SUPPLIED LOOSE, TO BE
PLACED ON CAPACITOR
DISCONNECT ENCLOSURE

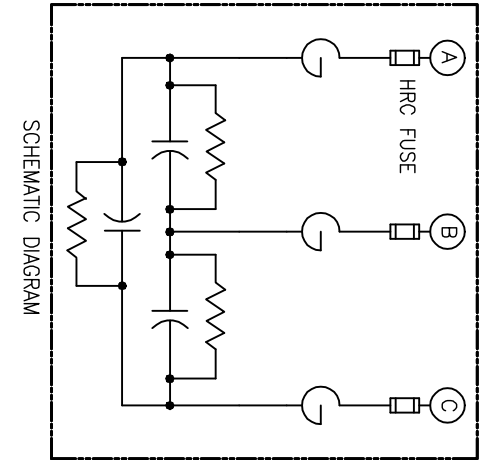

- Notes:**
1. Discharge resistors provided.
 2. NEMA 3R Galvanized enclosure.
 3. Floor mounting brackets provided on request.
 4. All dimensions in mm unless noted otherwise.

This drawing is the property of Electrotek Ltd. The information and technology herein may not be used nor reproduced without the written permission of Electrotek Ltd. All reproductions, in whole or in part, including any drawings, shall refer to this drawing.

Revised: 22/01/26

Title: Typical Fuse Packaged Capacitor with ICL

Model: RS00F



1016 34 AV SE Calgary, AB
T2G 1V4 Canada
Tel: 403 267 2200 Fax: 403 267 3808
contact@electrotekltd.com
www.electrotekltd.com

Page: